


CHEMICAL PUMPS SINCE 1992

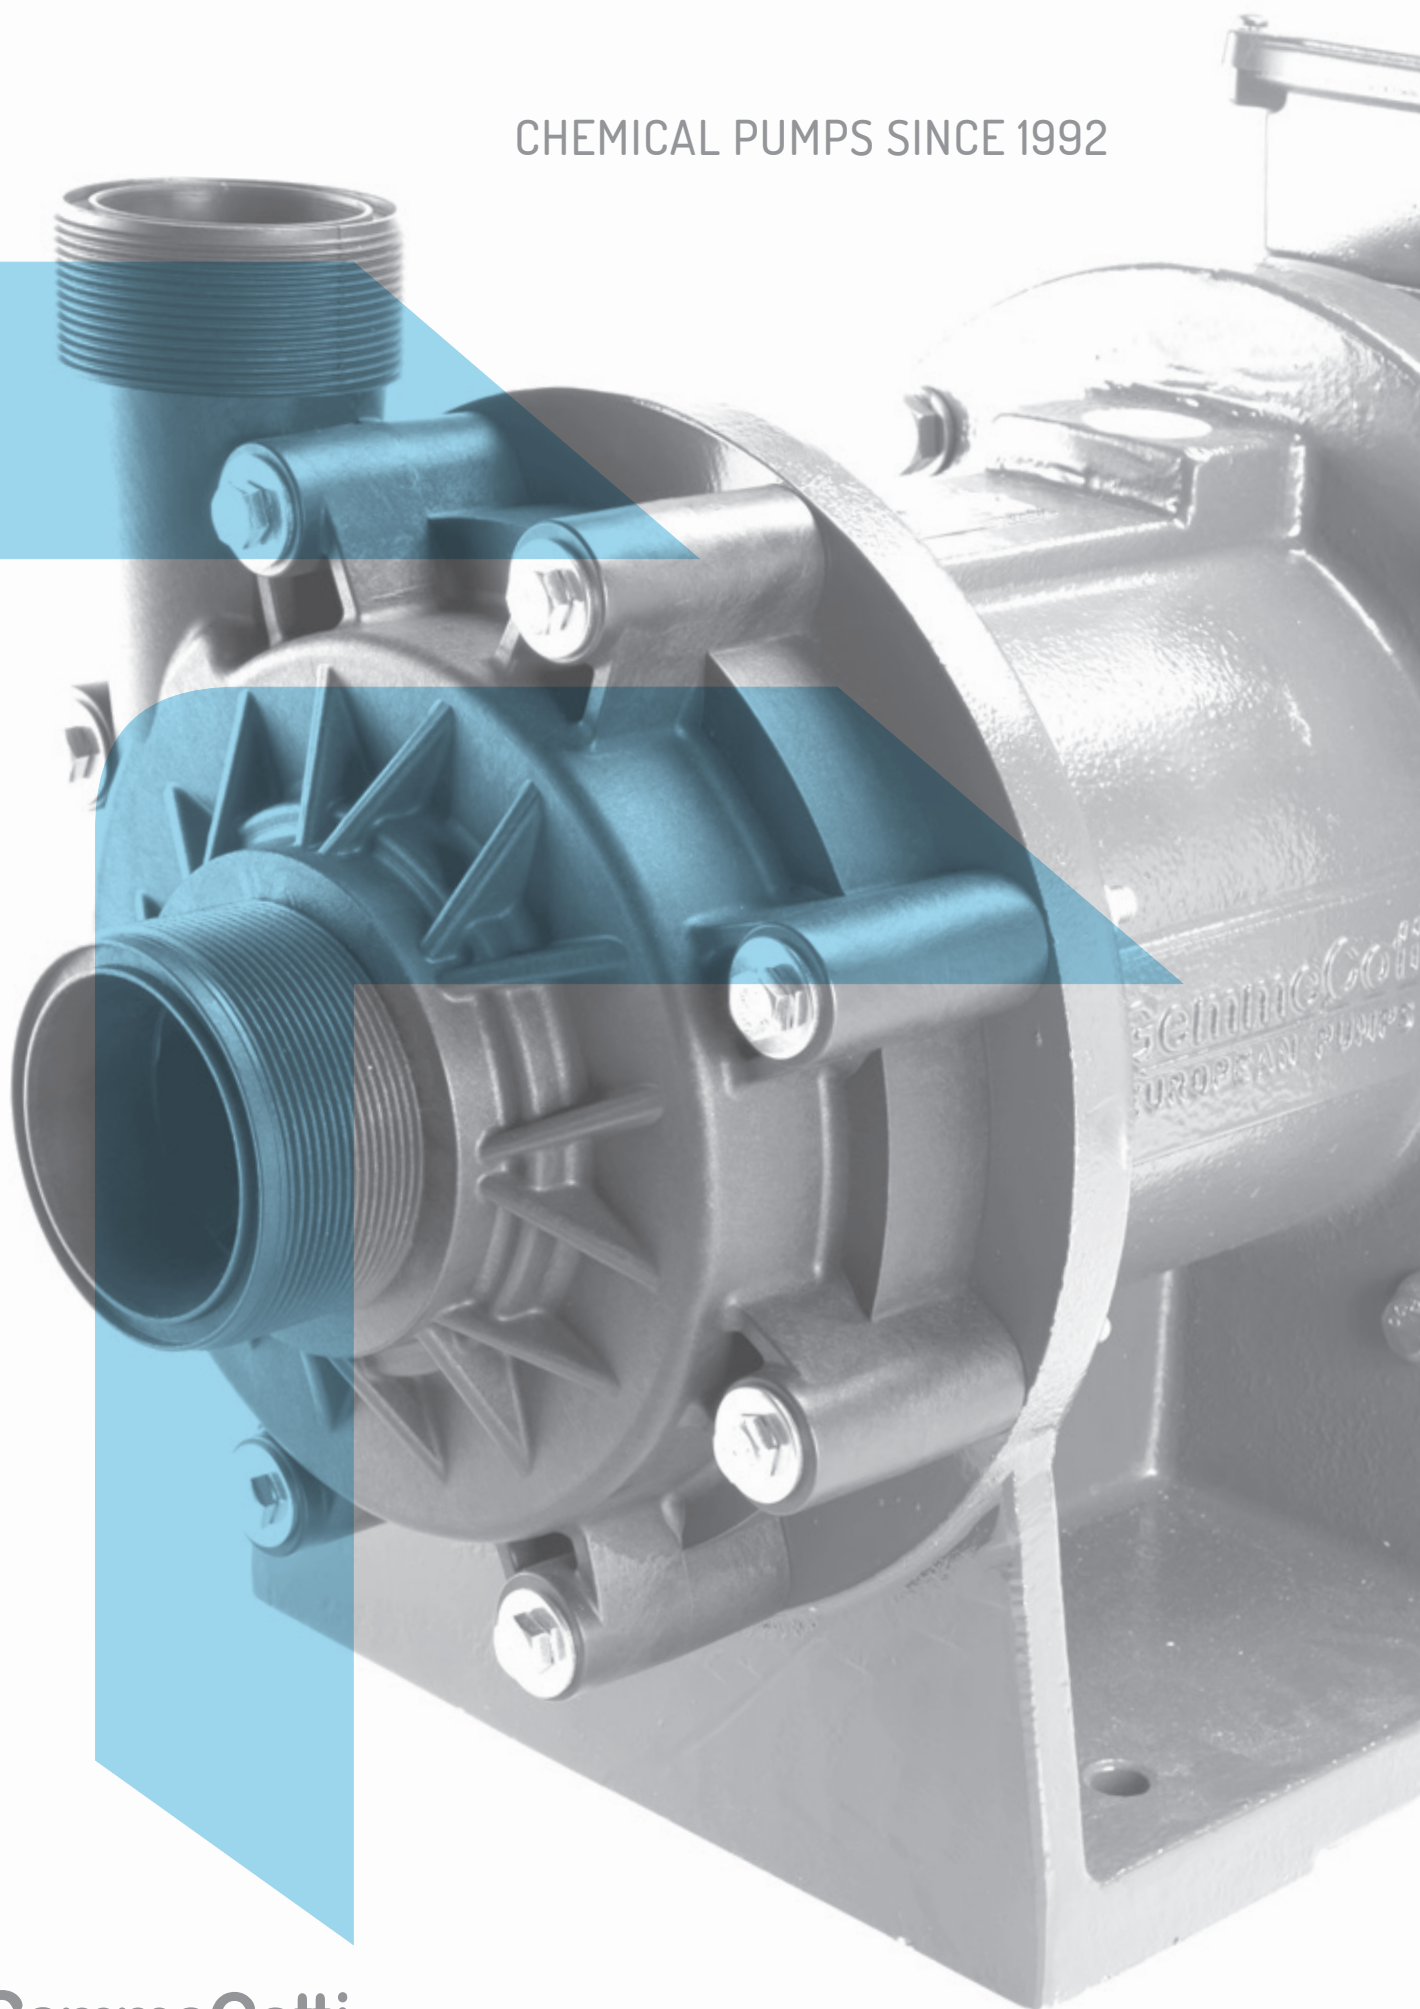

BASEPLATES

Baseplate in PP suitable for pumps complete with motors B3/B5.

Available in 3 different dimensions:

- BASEPLATE TYPE "A" suitable for:
IEC motors B3/B5 from size 56 to size 71
- BASEPLATE TYPE "B" suitable for:
IEC motors from size 80 to size 90 and
NEMA motors 56TC and 145T.
- BASEPLATE TYPE "C" suitable for:
IEC motors from size 100 to size 112 and
NEMA motors 184T.



57

DRY-RUNNING PROTECTION

The dry-running protection is a useful device that prevents expensive damage to pumps. It avoids the dry-running working, the closed discharge and the blocked suction and it's particularly indicated for unloading tank truck or every other application in which it's not sure if the liquid is constantly present in the pipes.



FLANGES

GemmeCotti pumps are usually supplied with threaded connections. Upon request we can also supply DIN or ANSI flanges for thermoplastic pumps (flat stub + free flange) and welded DIN or ANSI flanges for AISI316 pumps.





GEMMECOTTI SRL

Via A. Volta 85/A
20816 Ceriano Laghetto MB
ITALY
EUROPEAN UNION

Ph: +39 02.96460406
Fax: +39 02.96469114

info@gemmecotti.com
www.gemmecotti.com

