



ALIAMAG

Converter For Electromagnetic Flowmeter

Model AMC3200 Series

GENERAL

ALIAMAG The ALIAMAG AMC3200 Series converter is a microprocessor based intelligent transmitter that can be paired with any of the Alia AMF series sensors. The unit features multiple display parameters including flow rate, flow total, diagnostics, programming and troubleshooting. It's equipped with bluetooth, HART and MODBUS communication functions.

FEATURES

- ❑ Three line LCD display Flow Rate / Totalizer
- ❑ Accuracy of +/-0.2% value of reading
- ❑ Bi-directional flow measurement, current and pulse output
- ❑ Explosion Proof, Ex d (ib) ibq IIB T5
- ❑ Bluetooth / MODBUS / HART communication
- ❑ Converter can be rotated at Four directions for easy installation



STANDARD SPECIFICATION

- | | | | |
|-------------------|--|-----------------------|--|
| ● Excitation | : DC pulsed | ● Keypad | : 3 Internal keys for programming and display control |
| ● Display | : 3 Lines LCD with illumination | ● Data Storage | : Operation parameters and totalizer figures are stored by EEPROM for more than 10 years |
| Line 1 | : 11 Digit totalizer for forward flow | ● Low Flow Cutoff | : 0-9.9% |
| | : 11 Digit totalizer for reverse flow | ● Damping | : 0-99 Seconds |
| | : 11 Digit totalizer for difference | ● Density Setting | : 0.1-9.99 g/cm ³ |
| Line 2 | : 5 Digit flowrate / velocity / % / mA / Hz | ● Self Diagnosis | : The following error message are displayed if failure occurs |
| Line 3 | : Parameter / Query / Clr tot / Query LOG | | - Coil failure |
| Alarm, Guidance | | | - Power failure |
| Totalizer Unit | : t, kg, g, lb, Ston, Lton, m ³ , L, mL, lgal, gal, Mgal, bbl, ft ³ , a-ft | | - Overranged Output |
| Time Unit | : sec, min, hour, day | | - Internal error |
| ● Measuring Range | : Min. 0-0.15 m/s | | - Overflow |
| | : Max. 0-15 m/s | | - Empty pipe |
| ● Accuracy | : +/-0.2% of reading (Velocity ≥ 0.5 m/s) | ● Cable Entry | : Standard: M20 Option: 1/2"NPTF |
| | : +/-0.001 m/s (Velocity < 0.5 m/s) | ● Protection Class | : IP67, Explosion Proof, Ex d (ib) ibq IIB T5 |
| ● Repeatability | : +/-0.05% of reading | ● Ambient Temperature | : -25~65 °C |
| ● Current Output | : 4-20 mA (Isolated) | ● Material | : Aluminum Alloy |
| Load | : Max. 600 Ω | ● Power Supply | : 90-260 VAC, 50/60 Hz |
| ● Pulse Output | : Open collector | | : 24 VDC +/-10% (Option) |
| Rating | : 3-30 VDC, 50 mA Max. | ● Power Consumption | : 3-17 W (Dependent on sensor size) |
| ● Pulse Rate | : 1)Scale pulse (mL/Pulse, L/Pulse, Other) | ● Weight | : 4.5 kg |
| | : 2)Frequency: 0-5000 Hz | ● Mounting | : Bracket on 2" pipe |
| ● Pulse Width | : 50% of band width | | |
| ● Alarm | : High / Low with open collector output | | |
| Rating | : 3-30 VDC, 50 mA Max. | | |
| ● Communication | : Bluetooth (Android)Standard | | |
| | : RS485 (MODBUS Protocol)Standard | | |
| | : HART signal (Compatible)Optional | | |




ALIA TECHNOLOGY LLC

633 W. 5th Street, 26th Floor, Los Angeles, CA 90071, USA
TEL : + 1 - 213 - 533 - 4139 FAX : + 1 - 213 - 223 - 2317




URL : www.alia-inc.com
E-mail : alia@alia-inc.com
AMC3200V1.2.2.r2.A4.en

DIMENSIONS

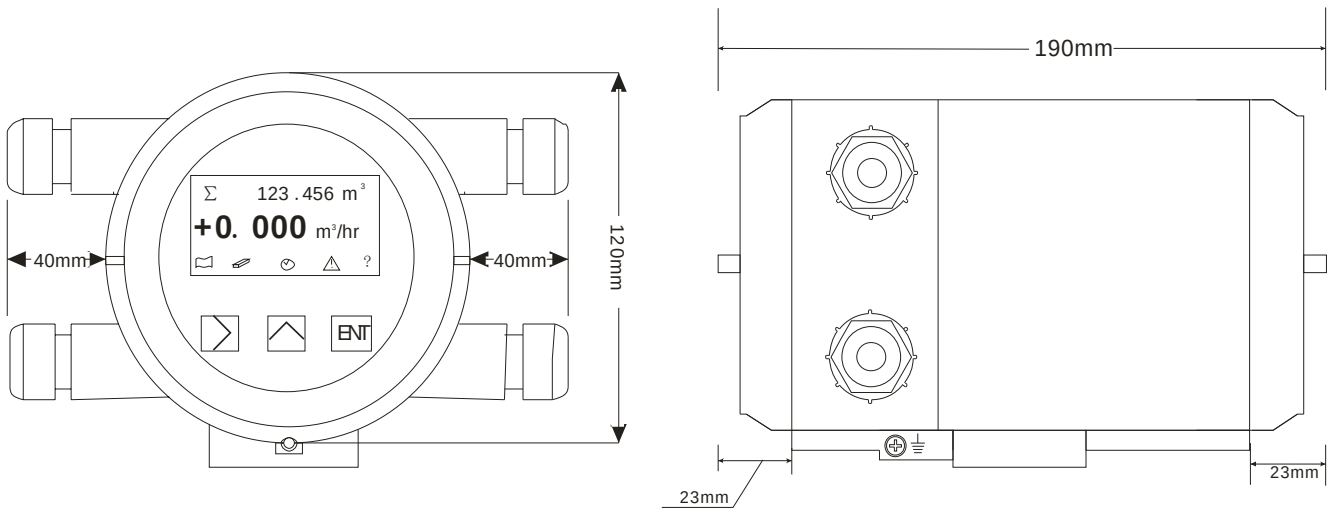

WIRING DIAGRAM

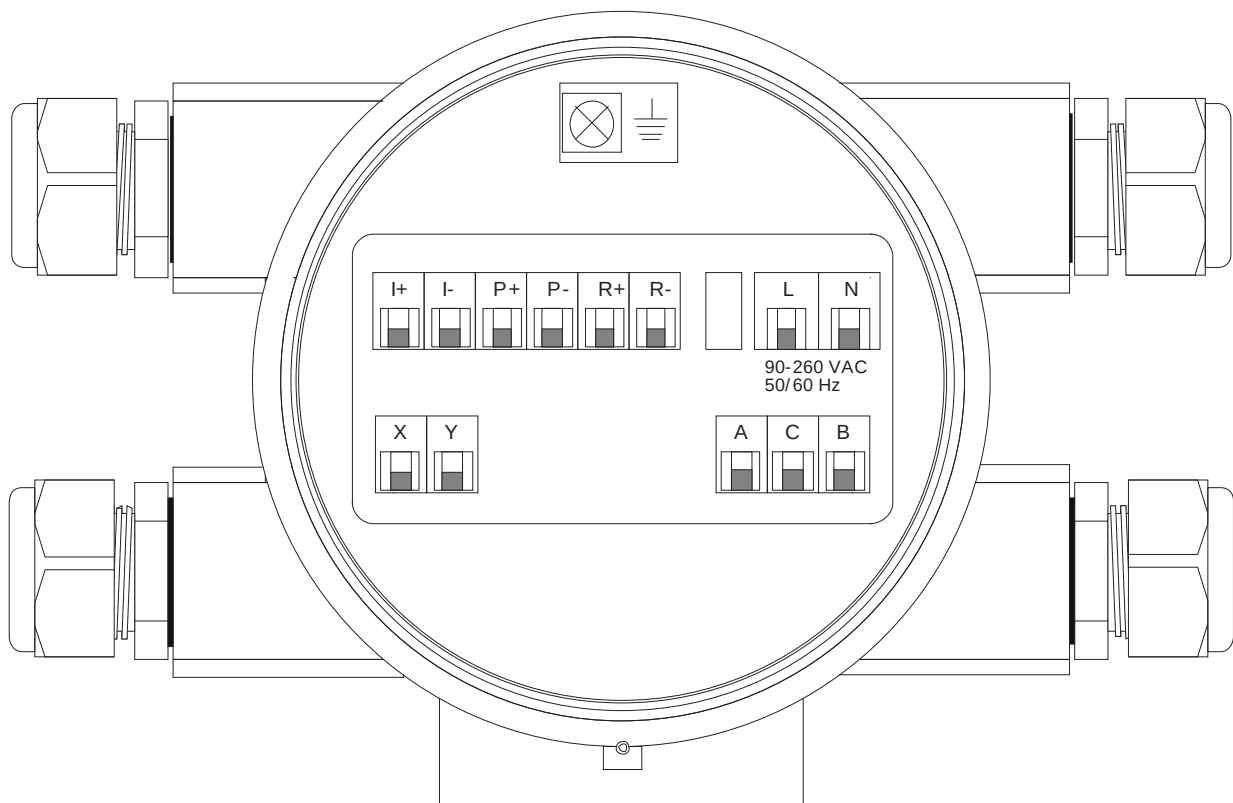


I+: 4-20 mA Output +
I-: 4-20 mA Output -


P+: Pulse Output +
P-: Pulse Output -

R+: RS485 Output +
R-: RS485 Output -

➤ACCURACY

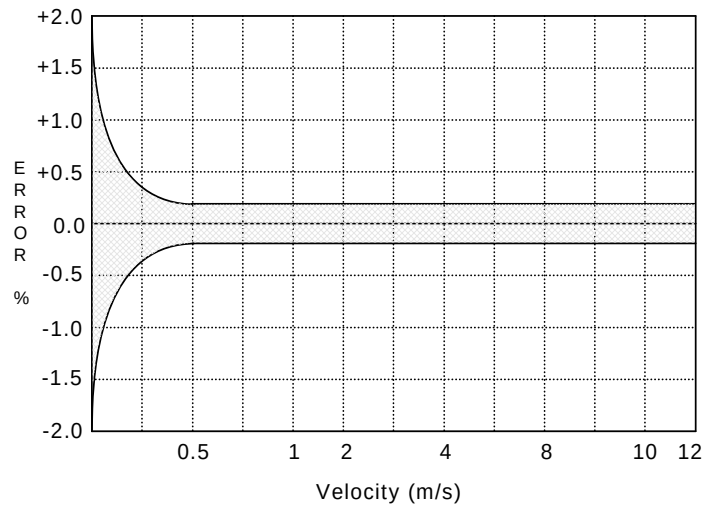

➤CABLE LENGTH BETWEEN SENSOR & CONVERTER

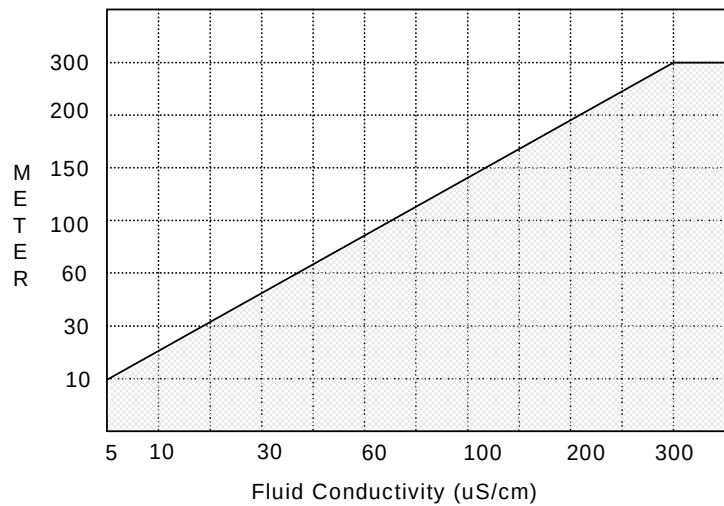

➤MODEL SELECTION GUIDE

AMC3200 Series					
Example: AMC3200-AC-CP-EX-HT/PT					
AMC3200-	XX-	XX-	XX-	XX	Description
Power Supply	AC-				90-260 VAC, 50/60 Hz
	DC-				24 VDC, +/-10%
Mounting	CP-				Compact with Sensor
	S2-				Remote, 2" Mounting Bracket or Wall Mounting
Protection Class		NN-			IP67
		EX-			Explosion Proof, Ex d (ib) ibq IIB T5
Option			NN	None	
			HT	HART Signal (Compatible)	
			PT	Cable Entry 1/2" NPTF	

BUILD OPTIONS-(COMPACT OR REMOTE)

