

5
YEARS
WARRANTY
FLAME DETECTOR

SENSE-WARE

THE FLAME DETECTOR
COMPANY



Model UV/IR-210/1

UV/IR Flame Detector

The Sense-WARE UV/IR Flame Detector is designed to give optimum performance for Zone 2 and Safe Area flame detection. Designed to detect all types of hydrocarbon fires and hydrogen fires and immune to false alarms, the Model UV/IR-210/1 offers a cost effective solution for Zone 2 and Safe Area industrial and commercial applications.

The Retroreflective ring around the window allows for easy testing with a Sense-Ware Test Lamp. The Pressure Compensating Element (PCE), prevents water ingress damaging the electronics.

Sense-WARE Flame Detectors offer fast performance, with a 5 year warranty making them the Best in Class.

- UV Sensor
- IR Sensor
- Corrosion proof GRP housing
- Non-Incendive for Zone 2
- Weather Resistant
- Relay & 4-20 mA Outputs
- Automatic & Manual Self Test
- 5 Year Warranty
- ATEX, IECEx & FM3611 Approved
- EN54-10 & FM3260 Approved
- Suitable for Zone 2 & Safe Areas
- Low Power

Typical Applications

- Aircraft Hangars • Atriums • Battery Storage Rooms
- Biogas • Car, Train Bus, Tram and Train Parkings
- Clean Rooms • CNG Filling • Diesel Engine Rooms
- Electric Power Transformers • Engine Test Cells
- Fume Hoods • Gas Cabinets • Gasoline/Gas Engine Rooms
- Service & Charging Stations • Heating Rooms for Chemicals
- Hydraulics e.g. Extruders • Chemical, Fuel & Solvent Storage
- Hydrocarbon Storage and Processing
- Hydrogen Storage and Processing
- Laboratories • Loading / Unloading Terminals
- Monitoring of Machinery • Chemical Storage
- Hydrogen Storage • Oil and Gas Pipe Line and Pumping Stations
- Recycling and Waste Processing Plants • Wind Turbines

Specifications

Spectral Range

UV 185 - 260 nm
IR 2.7 μm

Maximum Range

23 Meters (75 ft)
0.09 m² (1 Sq.Ft.) Heptane pan fire

Typical Response

<10 Seconds

Field of View

90° x 90°

Input Power

10-28 VDC

Current (Normal)

25 mA @ 24 VDC
(75 mA peak during Self-Test)

Current (Alarm)

\pm 40 mA @ 24 VDC

Start Up Time

<10 Seconds

Analogue Signal - Sink

0-20 mA

Power Fault

0 mA

Optical Fault

2 mA

Normal Operation

4 mA

Alarm

20 mA

Relays

Alarm & Fault SPDT

Relay Contact Rating

30 VDC / 2 A / 60 W

Latching (default) / Non Latching

DIL Switch selectable

Normal Operation


Green LED

Alarm Indication

Red LED

Fault Indication

Yellow LED

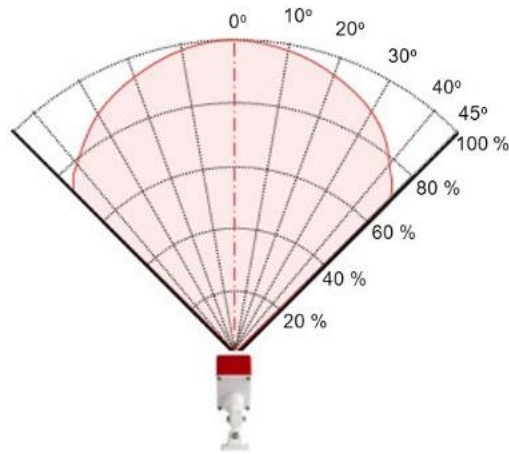

Automatic Self-Test

Once per Hour

Manual Self-Test

Available (see Manual)

Cable gland (pre-mounted)

1 x M20

Cable diameter

5.5-13 mm / 20-60 AWG

Housing

GRP

Temperature Range

-25 °C to +70 °C Hazardous Area
-40 °C to +70 °C Safe Area

Humidity

0-95 % Non Condensing

Ingress Protection

IP65

Pressure Compensation

PCE

Weight

465 g

Dimensions

125 x 80 x 57 mm

Warranty

5 Years

SENSE-WARE
THE FLAME DETECTOR
COMPANY



Model UV/IR-210/1

Approvals

EN54-10

Performance, Class 2

ATEX, IEC Hazardous Area

II 3G Ex nA IIC T4 Gc,
II 3D EX tc IIIC T71°C Dc

FM3260

Performance (see Manual)

FM3611 Hazardous Area

Non-Incendive: Class I, II, III,
Div 2, Groups A,B,C,D,F,G
(see Manual)

Accessories

I.S. Test Lamp

TC-940/1Z

Non EX Test Lamp

TC-169/1

Swivel Mount

SM21

Specifications may be subject to change

www.sense-ware.com

Europe, Middle East & Africa

SENSE-WARE Fire & Gas Detection B.V.

Fokkerstraat 25
3905 KV Veenendaal
The Netherlands
EU
Phone: +31 88 736 7300
Email: eu@sense-ware.com

North & South America

SENSE-WARE USA LLC

1037 Miller Lane
Lake Shore, MN 56468
USA
Phone: +1 612 562 7365
Phone: +1 218 330 4519
Email: usa@sense-ware.com

Asia Pacific

SENSE-WARE A.P.

59 Fen Ji Hu, Danshui
New Taipei City 25163
Taiwan
Mobile: +886 926 664 232
Phone: +886 2 8626 2893
Email: ap@sense-ware.com